

*ADFAST

CONSTRUCTION





320+ COLORS AVAILABLE

*This document is for reference only and should not be used as a color matching tool. Please contact your local representative to obtain a sample color chart.


ADSEAL DWS 4580

WEATHERSEAL NEUTRAL CURE SILICONE

320+ COLORS AVAILABLE MATCHES 1200+ PAINT & SIDING COLORS



- · 304ml cartridge, 400ml or 600ml sausage
- Ideal for movement and perimeter joints
- · Meets ASTM C920, S, NS, Class 50, NT, M, GA, O
- Meets AAMA 802 and 805 standards
- Can be used on aluminum, glass, masonry, some plastics, painted and unpainted metals
- Ideal for two or four sided curtain walls and architectural panels
- Compatible with sealed units
- Indoor and outdoor use
- Excellent resistance to UVs
- Non-corrosive
- · Low VOC
- Cannot be painted

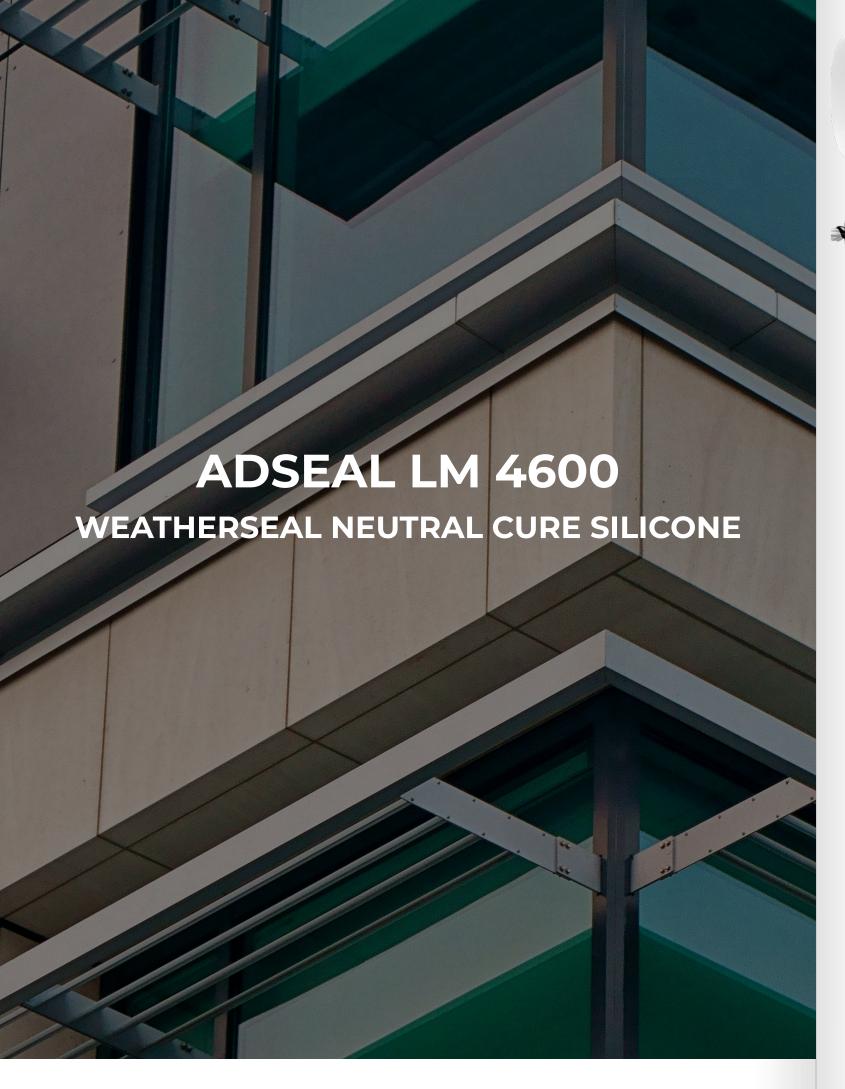



320+ COLORS AVAILABLE MATCHES 1200+ PAINT & SIDING COLORS


- · 304ml cartridge, 400ml or 600ml sausage
- Expansion joint sealant
- Meets ASTM C920, S, NS, Class 100/50, NT, M, G A, O, ASTM C1382 (EIFS) Exterior Insulation and Finish Systems
- Excellent adhesion to masonry, anodized aluminum, painted metals, some plastics and glass
- Indoor and outdoor use
- Excellent resistance to UVs
- Non-corrosive
- Low VOC
- Cannot be painted







- 304ml cartridge, 400ml or 600ml sausage
 Meets ASTM C920, S, NS, Class 50, NT, M, G, A, O
- Meets AAMA 802, 803 and 805 standards
- Meets ASTM E84 (4559) FSI: 0 / SDI: 20
- Excellent adhesion to doors, windows, curtain wall assemblies, cold rooms, clean rooms, laboratories, ventilation, and mirrors.
- Indoor and outdoor use
- Excellent resistance to UVs
- Non-corrosive
- Low VOC

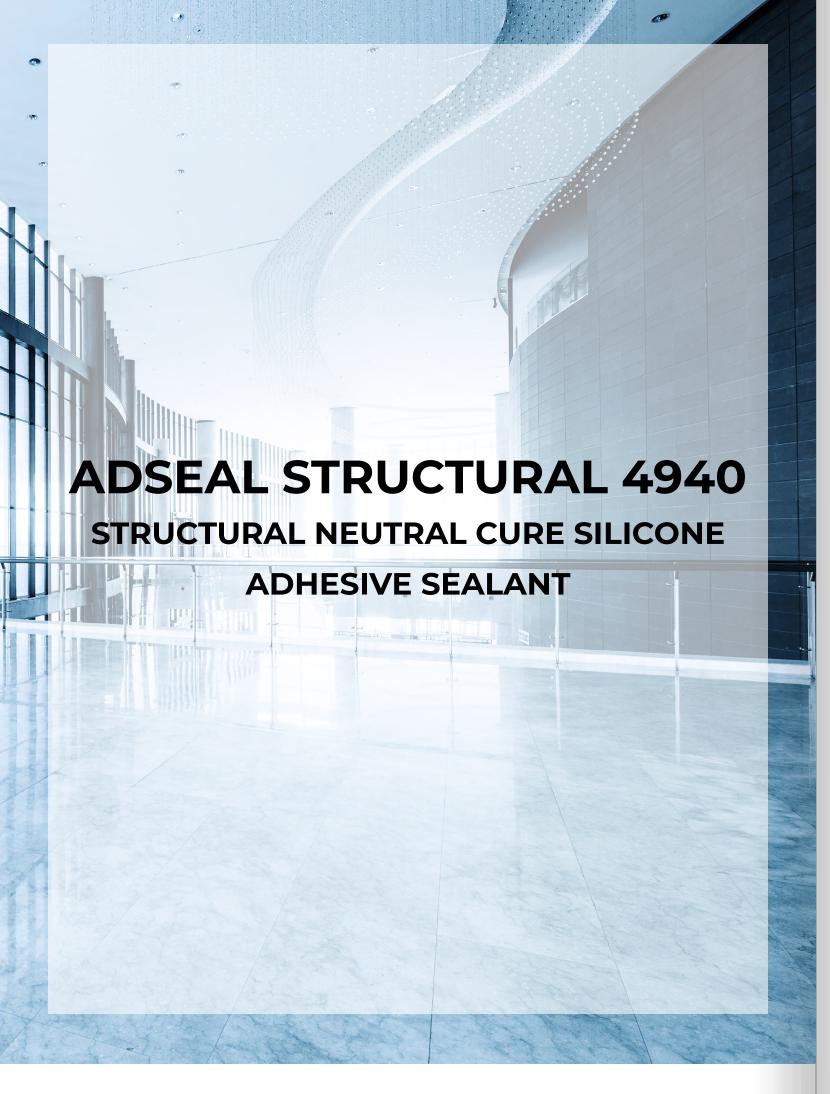



- · Ideal for the manufacturing of two and foursided curtain walls and architectural panels
- Meets ASTM C920, S, NS, Class 50, NT, G, A, O
- Excellent adhesion to anodized aluminum and glass
- Indoor and outdoor use
- Excellent resistance to UVs
- Non-corrosive
- Low VOC

ADSEAL DWSP 1940 WEATHERSEAL HYBRID ADHESIVE SEALANT

- Paintable
- Excellent adhesion to several types of siding
- · Meets ASTM C920, S, NS, class 50, NT, M, G, A, O
- Very good elongation
- · Ease of application in cold weather
- Solvent-free
- Isocyanate-free
- Phthalate-free
- · Low VOC
- Good resistance to UVs
- Outdoor use
- Large choice of colors





	1941	1942	1943	1945	1949	194-13	194-14
	Ultra Clear	White	Black	Glacier White	Gray	Sand	Yellowstone
	194-15	194-16	194-17	194-18	194-19	194-20	194-22
	Barista	Khaki	Cliffside	Sandalwood	Coastline	Red Fox	Granite
	194-23	194-24	194-25	194-26	194-27	194-28	194-29
	Timber Bark	Taupe M	Navajo Beige	Chestnut Brown	Cobble Stone	Rustic Brown	Aged Pewter
	194-30	194-31	194-32	194-33	194-34	194-36	194-37
	Scotia Blue	Night Gray	Muskoka	Charcoal	Translucent	Barn Wood	Walnut
ı	194-38	194-39	194-46	194-47	194-52	194-55	194-57
	Gray Wolf	Dark Aluminum	River Rock	Commercial Brown	Country Red	Midnight Blue	Cedar
	194-63	194-66	194-88				
	Sierra	Acadia	Mist Grav				







ADSEAL CLEANER 6003

Multi-purpose cleaner, 10L or 470mL format





WIPE CLOTHS

Dry cloths to remove uncured adhesive on tools & surfaces



ORDER NOW

ADSEAL WET WIPES

Cleaning wipes to remove uncured adhesive on tools & surfaces



MK60095

Brush primer for difficult to adhere surfaces





ACCESSORIES



ORDER NOW





For 400ML sausage format





PROFESSIONAL SERIES COX 61001 For 304ML cartridge format COX 61006-10 For 400ML sausage format COX 61006-20 For 600ML sausage format

ACCESSORIES

CAULKING GUN NOZZLES



2N1006Caulking gun sausage cone



2N1007Caulking gun sausage cone



935-4Caulking gun sausage cone, 45°



Caulking gun sausage cone, 45°



D04Spare nozzle for cartridges,
Length of 7 in.



360 NOZZLESpare nozzle for cartridges, 360°



BJ NOZZLESpare nozzle for cartridges,
45°-90° adjustable nozzle kit

ACCESSORIES SHAPING TOOLS FOR SEALANT JOINTS



BLUE SHAPING TOOL

· For small jobs, 4 angles of shaping



TOOLING KIT

 For larger jobs, set of 7 wooden sticks, various widths for multiple angles of shaping

ACCESSORIES BACKER RODS AND SETTING BLOCKS



BACKER RODS

 Soft bi-cellular backer rods of various dimensions



SETTING BLOCKS

 Setting blocks for sealed units, different dimensions, with or without drainage groove



ONLINE TOOLS

PRODUCTS

FIND THE PERFECT PRODUCT FOR YOUR PROJECT

COLORS

FIND THE PERFECT MATCH FOR YOUR PROJECT

CALCULATOR

FIND THE RIGHT SEALANT QUANTITY FOR YOUR PROJECT





1875

- Insulation of doors and windows
- Applicable in temperatures as low as
 -5°C (41°F)
- Meets CAN / ULC S102 and ASTM E84 standards
- · 70% to 80% of closed cells
- · Gun grade






AVOID AIR DRAFTS!







INSULATE YOUR DOORS AND WINDOWS DURING HARSH WINTERS

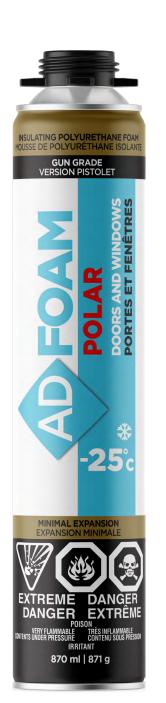


ORDER NOW

1825

- Applicable in temperatures as low as -25°C (-13°F)
- · High density foam for better insulation and soundproofing
- · High pressure can ensures 100% of the foam is expelled and used

MORE ABOUT PRODUCT

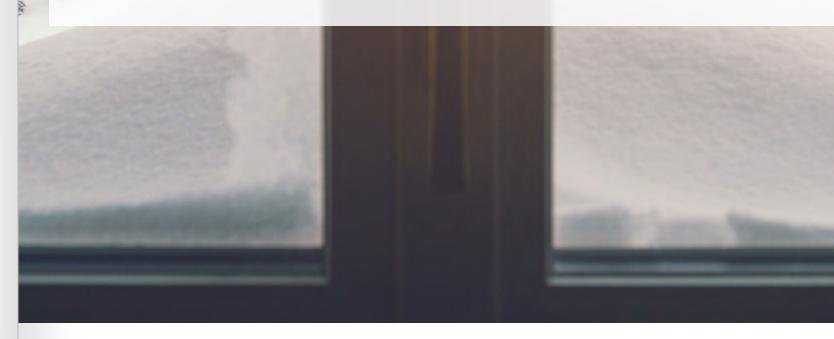





INSULATE WITH GREATER FLEXIBILITY



1865

- Minimal expansion foam for doors, windows and curtain walls
- Elongation at break: 36% 38%
- \cdot Very low V.O.C.: 2 g / L
- · Compression strength: 9.4 psi (10%)
- Tack free time: 4 8 minutes (diameter of 1 cm)
- · Cutting time: 20 45 minutes (diameter of 1 cm)
- Application temperatures: -2°C (28°F) to 30°C (86°F)
- Temperature resistance: -40°C (-40°F) to 80°C (176°F)
- Coverage: up to 45 liters depending on temperature and humidity



SLOW DOWN FLAME PROPAGATION

ORDER NOW



1860

- Firewall up to 235 minutes
- · Very low V.O.C.: 2 g/L
- · Plumbing, electrical and other applications
- · Compression force: 4.35 psi (10%)
- · Dry to the touch: 4 10 minutes (1cm diameter)
- · Cutting time: 30 45 minutes (diameter of 1cm)
- Application temperature: 5°C (41°F) to 30°C (86°F)
- · Temperature resistance: -40°C (-40°F) to
- · 90°C (194°F)
- Coverage: up to 45 liters depending on temperature and humidity





FILLERS AND CRACKS



1840

- Triple expansion
- Applicable in temperatures as low as -5°C (23°F)
- Meets CAN/ULC S102 and ASTM E84 standards
- Straw version

ADDITIONAL PRODUCTS

Multi-purpose cleaner for Adfoam guns and surfaces



CLEAN 500

- Removes unreacted Adfoam polyurethane foam residues
- Plug for spraying
- · Adapter for Adfoam foam gun







ACCESSORIES FOAM GUNS AND NOZZLES





ADFOAM NOZZLE II
Extension for Adfoam gun ADFOAM GUN II



ORDER NOW

ADFOAM GUN LONG
Adfoam gun with 48 inch nozzle





ADBOND EX 5690

- Adhesion to wood, rigid insulation panels (EPS, XPS, PIR and PU), glass, metals, masonry, etc.
- Indoor or outdoor
- Can be painted
- Very good water resistance



ADBOND EXTREME 5692

- Hybrid construction glue
- Good adhesion to wood, rigid insulation boards, glass, metals and masonry.
- Can be painted
- Water resistant



